


Glazing press

For the glazing of uPVC window elements with pneumatic-synchronous move and clamping of both clamping bars.

VPPH

Characteristic features:

- Solid construction
- High accuracy of angles
- Profile support with sliding guide rails
- Pneumatic-synchronous move and clamping of both clamping bars
- Ergonomic working due to pneumatic height adjustment with 500 mm stroke
- Suited for production lines, as the pressing bars fold automatically to the back
- 120 mm with clamping beam
- Stroke 500 mm

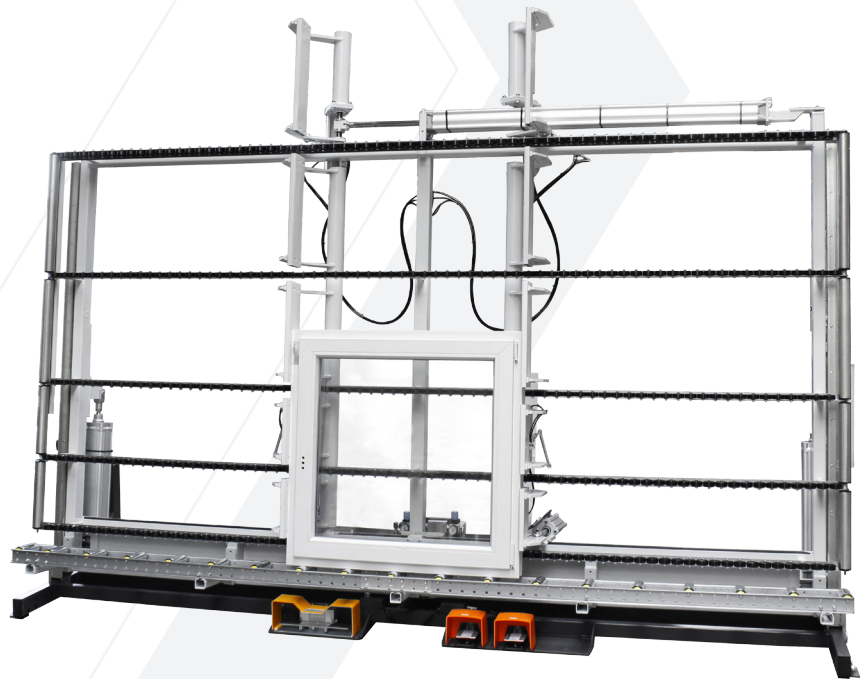

Optional extras:

- Sash stops
- Underframe with locking brake
- Distance between the rollers of the horizontal roller conveyor 100 mm
- Rear profile system with felt or brush strips as well as PVC or Desmopan rolls
- Stroke 700 mm
- 200 mm with clamping beam

Type	Item no.	Width (mm)	Height (mm)	Working width (mm)	Working height (mm)
VPPH 3000	48.34K001	3.000	2.650	2.200	2.300
VPPH 3600	48.34K002	3.600	2.650	2.800	2.300
VPPH 4000	48.34K003	4.000	2.650	3.200	2.300
VPPH 5000	48.34K004	5.000	2.650	4.200	2.300